

# Nextiva S28000e IP PTZ Dome Camera

---

V-UCM Universal Ceiling Mount

**VERINT.**

VIDEO INTELLIGENCE SOLUTIONS™




2009 Verint Systems Inc. All Rights Reserved Worldwide.

Unauthorized use, duplication, or modification of this document in whole or in part without the written consent of Verint Systems Inc. is strictly prohibited. By providing this document, Verint Systems Inc. is not making any representations regarding the correctness or completeness of its contents and reserves the right to alter this document at any time without notice. Features listed in this document are subject to change.

Verint Systems Inc. does not warrant, guarantee or make any representation regarding the use or the results of the use of the information, links, tools, and materials in terms of the accuracy, reliability, quality, validity, stability, completeness, currentness, or otherwise of its content or products. The entire risk as to the use, results and performance of information, links, tools and materials provided or referenced herein is assumed by the user. Verint Systems Inc. shall not be liable for damages resulting from the use, misuse or unlawful use of the information, links, tools, and materials contained or referenced herein.

The Verint Systems Inc. products are protected by one or more of the following U.S., European or International Patents: USPN 5,659,768; USPN 5,689,442; USPN 5,790,798; USPN 6,278,978; USPN 6,370,574; USPN 6,404,857; USPN 6,510,220; USPN 6,724,887; USPN 6,751,297; USPN 6,757,361; USPN 6,782,093; USPN 6,952,732; USPN 6,959,078; USPN 6,959,405; USPN 7,047,296; USPN 7,149,788; USPN 7,155,399; USPN 7,203,285; USPN 7,216,162; USPN 7,219,138; USPN 7,254,546; USPN 7,281,173; USPN 7,284,049; USPN 7,325,190; USPN 7,424,715; USPN 7,466,816; USPN 7,478,051; USPN RE40,634; and other provisional rights from one or more of the following Published US Patent Applications: US 11/394,408; US 11/771,499; US 11/396,514; US 11/772,440; US 11/565,943; US 11/565,946; US 11/565,948; US 11/540,739; US 11/540,086; US 11/541,313; US 11/541,252; US 11/540,282; US 11/529,947; US 11/540,785; US 11/540,736; US 11/540,904; US 11/540,353; US 11/608,340; US 11/608,350; US 11/608,358; US 11/567,808; US 11/692,983; US 11/693,933; US 11/693,923; US 11/693,828; US 11/567,852; US 11/608,440; US 12/015,621; US 11/540,322; US 11/924,201; US 11/616,490; US 11/621,134; US 11/752,458; US 11/712,933; US 11/824,980; US 11/729,185; US 11/804,748; US 11/831,260; US 11/395,992; US 11/359,319; US 11/359,195; US 11/359,357; US 10/832,509; US 11/742,733; US 11/831,257; US 11/831,250; US 11/691,530; US 11/479,267; US 11/529,942; US 11/768,349; US 11/540,281; US 10/633,357; US 11/693,899; US 11/479,056; US 11/529,132; US 11/540,320; US 11/037,604; US 11/529,842; US 11/540,171; US 11/478,714; US 11/529,946; US 11/868,656; US 11/776,659; US 11/090,638; US 11/410,004; US 10/771,315; US 10/771,409; US 11/540,900; US 11/528,267; US 12/118,781; and other U.S. and International Patents and Patents Pending.

VERINT, the VERINT logo, ACTIONABLE INTELLIGENCE, POWERING ACTIONABLE INTELLIGENCE, WITNESS ACTIONABLE SOLUTIONS, STAR-GATE, RELIANT, VANTAGE, X-TRACT, NEXTIVA, ULTRA, AUDIOLOG, WITNESS, the WITNESS logo, IMPACT 360, the IMPACT 360 logo, IMPROVE EVERYTHING, EQUALITY, CONTACTSTORE, and CLICK2STAFF are trademarks or registered trademarks of Verint Systems Inc. or its subsidiaries. Other trademarks mentioned are the property of their respective owners.

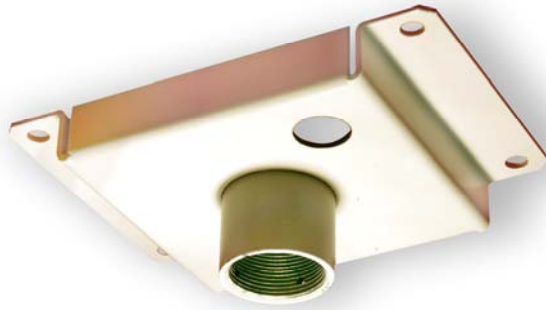

## V-UCM Universal Ceiling Mount for Nextiva® S2800e IP PTZ Dome Camera

- Convenient ceiling mounting for Nextiva S2800e
- Indoor or outdoor application
- Cable routing through mount
- Easy installation

The V-UCM Universal Ceiling Mount is designed for pendant mount Nextiva S2800e IP PTZ Dome Camera housings. It is a medium-duty ceiling mount constructed of painted carbon steel, suitable for indoor or outdoor installations. It has a four hole mounting flange for ceiling mounting and a cable access hole. The V-UCM has a 1-1/2 inch NPT-F American National Standard Tapered Pipe Thread (NPT). The dome housing is mounted to the ceiling mount in this thread.

## Technical Information

### MECHANICAL

<b>Application:</b>	Indoor or outdoor.
<b>Mounting:</b>	Ceiling or horizontal structure.
<b>Mounting Thread:</b>	Standard 1-1/2 inch NPT-F pipe thread.
<b>Dimensions:</b>	See Figure 1. Height (H): 3.0 in. (76 mm). Width (W): 6.0 in. (152 mm). Depth (D): 9.1 in. (231 mm).
<b>Weight:</b>	3.3 lb (1.5 kg)
<b>Construction:</b>	Carbon steel.
<b>Finish:</b>	Painted white polyurethane.

<b>Shipping Dimensions:</b>	Height: 5.3 in. (135 mm).
<b>Shipping Weight:</b>	Width: 6.5 in. (165 mm).
<b>Shipping Volume:</b>	Depth: 9.6 in. (244 mm). 3.7 lb (1.7 kg). 0.2 ft <sup>3</sup> (0.005m <sup>3</sup> ).

### ENVIRONMENTAL

**Storage Temperature Range:** -40 to 150° F (-40 to 60° C).

**Storage Humidity Range:** 0 to 90% relative, non-condensing.

